Ordering Information

Commercial Reference

Commercial reference	Description	Ordering information
WiDy SenS 640V-ST	WiDy SenS 640 USB3 (VGA)	9SMC1601AE31VC0# #: product revision, B or higher
WiDy SenS 640V-STP	WiDy SenS 640 USB3 Gated (VGA)	9SMG1601AE31VC0# #: product revision, B or higher

Included Accessories

- USB and trigger Cable (SMC connector)
- NITVision GUI/NITLibrary SDK
- Cardboard shipping and storage box

Optional Accessories

- Heatsinks
- Optical Filter mount
- Hardened protective case

Custom variants (OEM)

Various options may be available depending on your camera model:

- Open frame housing
- Sensor without cover glass
- Flex configuration (sensor board split from camera electronics)
- …

For any specific requirements contact your sales representative or support@new-imaging-technologies.com

*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

FUNCTIONALITIES

Camera

Main camera features (For full documentation contact support@new-imaging-technologies.com):

Sensor characteristics	Sensor type	InGaAs (0.9-1.7 spectral response, see QE curve)
	Pixel pitch	$15\mu m$
	Resolution	640x512
	Sensor diagonal	12.3mm
	Sensor noise	• High gain (CDS): <50e^- • Low gain: < 270e^- • Log: <340e^-
	Dynamic range	• High gain (CDS): 49dB typical • Low gain: 63dB typical • Log: 120dB typical
	Peak QE	>70%
Camera features	Frame rate	>200Hz
	Sensor Readout	Global shutter: ITR (Integrate Then Read) and IWR (Integrate While Read) Gated mode (optional): ITR only
	Sensor modes	Global shutter: Log, Linear Low Gain, Linear High Gain and Linear High Gain with CDS Gated mode (optional): Log & Lin High
	Output Type	14 bits pixel format
	Exposure time	Minimum Integration time: 10us (Linear) / 100us (Log) Controlled by camera register or Trigger width Gated mode (optional): exposure time between 100ns and 9µs
	Trigger	Internal/External (LVTTL) Software Trigger
	Trigger delay	User-Selectable
	Partial reading mode	Region of Interest (ROI). User-Selectable with a step of 8 pixels Maximum FPS increase with reduced ROI
Software (Processing on host system)	NIT Software	NITVision GUI: • Windows/Linux, x64/aarch64 platforms NITLibrary SDK: • Windows/Linux, x64/aarch64 platform: C++/Python Windows, x64 platform: .NET
	AGC (Histogram Stretching)	Automatic/Manual Automatic: continuous offset and gain adjustment based on current image histogram User Selectable parameters: % pixels to ignore, ROI Manual: User-Selectable low and high limits
	NUC correction	Correction 1-Point or 2-Point. 2 Point factory calibrated @ 15°C sensor temperature
	Bad pixel correction	Factory calibrated Bad Pixel Map
	Temperature monitoring	Image Sensor
	Image Flip	Horizontal/Vertical
	Image recording	JPEG, PNG, TIFF
	Video recording	AVI, PTW


*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

Environment and mechanical characteristics	Power consumption (12V supply)	• Camera: <2.5W
		• Cooling: User-Selectable TEC power limit
		  ○ Off
		  ○ Low: <1Ws
		  ○ Medium: <2W
		  ○ High: <4W

	Storage temperature	-40 to +80°C
	Operating temperature	-40 to +71°C
	Size (WxHxL, mm)	46x46x56.9 90x46x56.9 with heatsinks
	Weight	<215g <315g with heatsinks
	Lens mount	C-Mount


*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

QE Curve (typical)

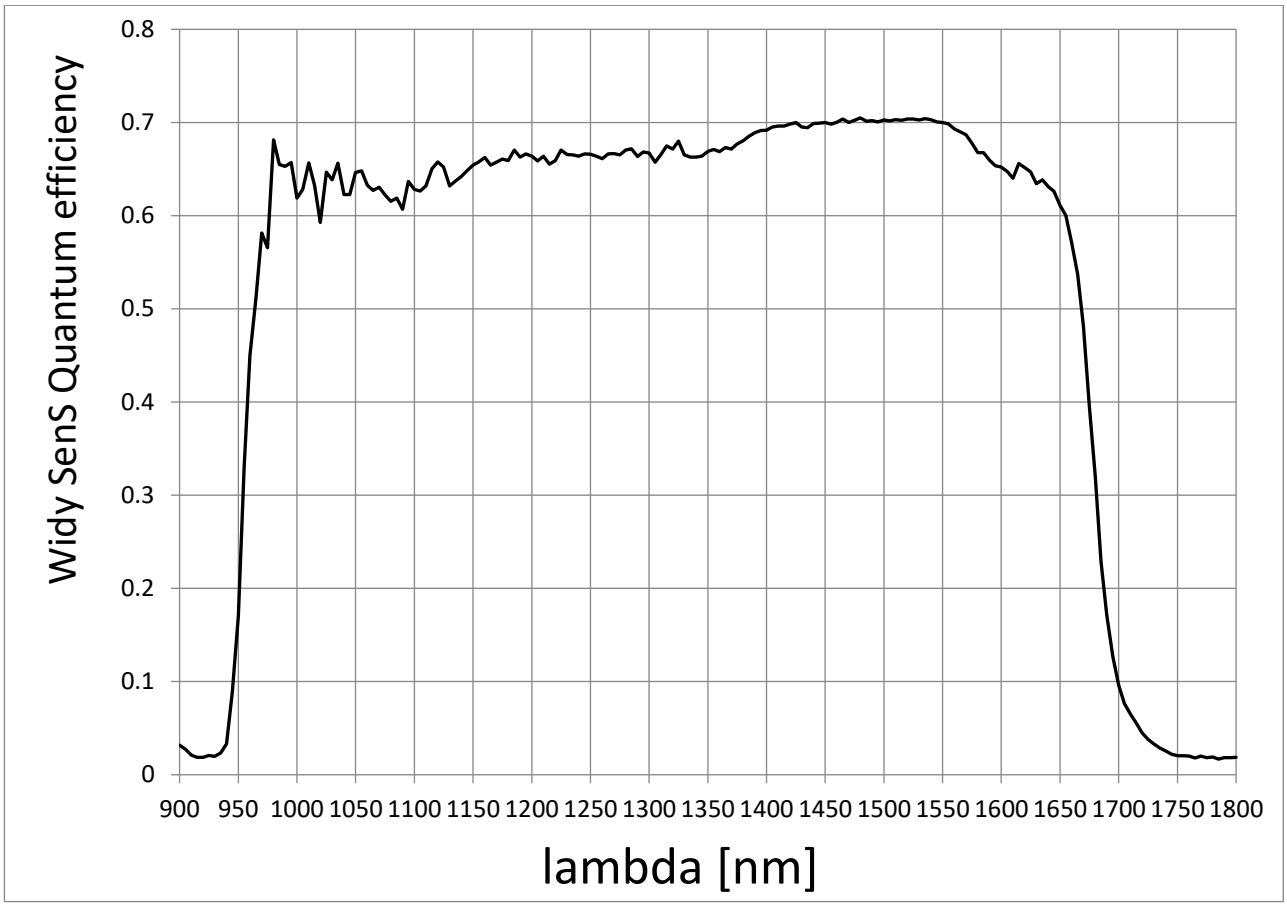

*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

Electrical ICD

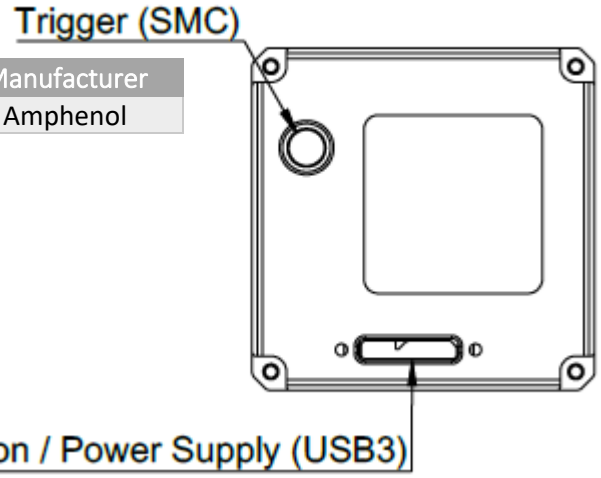


Reference	Designation	Manufacturer
152140	SMC connector	Amphenol

Reference	Designation	Manufacturer
897-10-010-00-300002	Mini USB 3.0	MILL-MAX

*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

Mechanical ICD (WiDy SenS 640 V-ST)

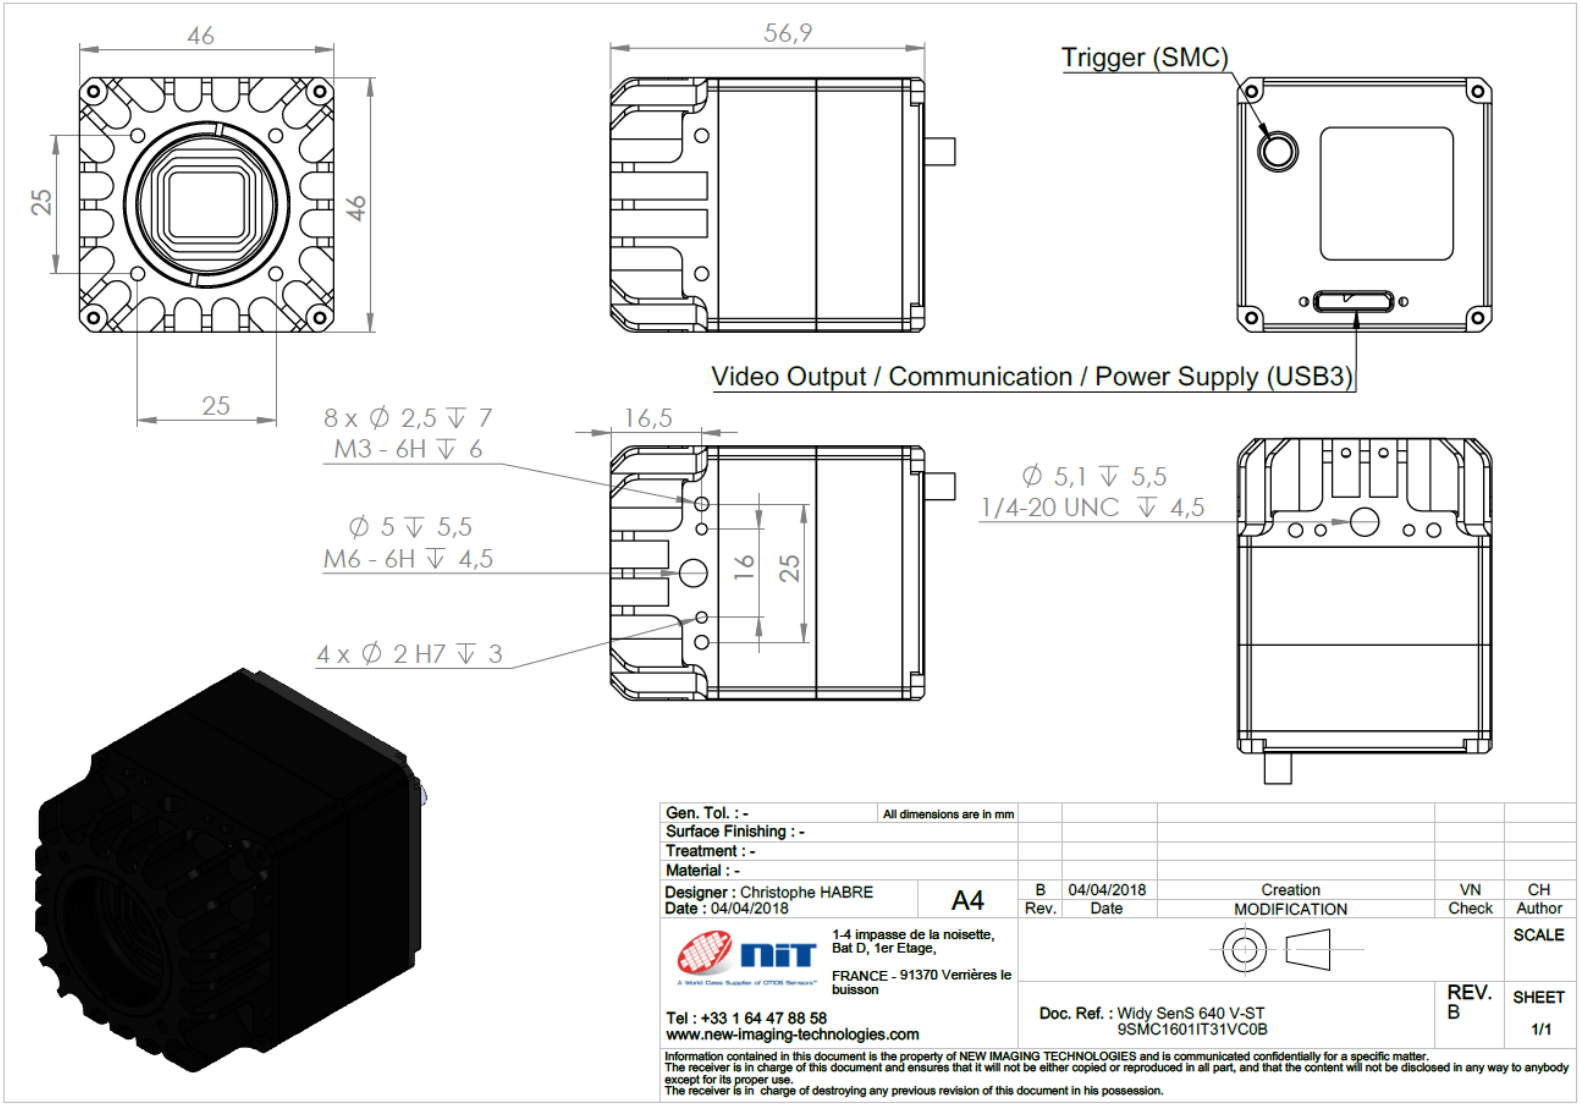

*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.

NIT
1 Impasse de la noisette, Bat D- 1er étage, BP426
91370 Verrières Le Buisson Cedex, France
Tel +33(0) 1 64 47 88 58
www.new-imaging-technologies.com
info@new-imaging-technologies.com

NIT, New Imaging Technologies and Native WDR, are trademarks of New Imaging Technologies.

*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by NIT without notice.
Products are only warranted by NIT to meet NIT's production data sheet specifications.